

BLACK AND GALVANIZED
Threaded, Plain or Beveled Ends

ASTM A53 Grade A or B
Continuous or Electric Resistance Welded
All Dimensions and Weights are Nominal

	Size in Inches	Diameters		Schedule	Thickness Inches	Weight Per Foot	Weight Per 21' Length
		External Inches	Internal Inches				
●	1/8	0.405	0.269	40	0.068	0.24	5.04
●	1/4	0.54	0.364	40	0.088	0.42	8.82
●	3/8	0.675	0.493	40	0.091	0.57	11.97
●+	1/2	0.84	0.622	40	0.109	0.85	17.85
●+	3/4	1.05	0.824	40	0.113	1.13	23.73
●+○	1	1.315	1.049	40	0.133	1.68	35.28
●+○	1 1/4	1.66	1.38	40	0.14	2.27	47.67
●+○	1 1/2	1.9	1.61	40	0.145	2.72	57.12
●+○	2	2.375	2.067	40	0.154	3.65	76.65
+○	2 1/2	2.875	2.469	40	0.203	5.79	121.59
+	3	3.5	3.068	40	0.216	7.58	159.18
	3 1/2	4.0	3.548	40	0.226	9.11	191.31
	4	4.5	4.026	40	0.237	10.79	226.59
	5	5.563	5.047	40	0.258	14.62	307.02
	6	6.625	6.249	—	0.188	12.89	270.69
	6	6.625	6.125	30	0.25	17.02	357.42
	6	6.625	6.065	40	0.28	18.97	398.37
	8	8.625	8.249	—	0.188	16.9	354.9
	8	8.625	8.125	20	0.25	22.36	469.56
	8	8.625	8.071	30	0.277	24.7	518.7
	8	8.625	7.981	40	0.322	28.55	599.55
	10	10.75	10.374	—	0.188	21.15	444.15
	10	10.75	10.25	20	0.25	28.04	588.84
	10	10.75	10.192	—	0.279	31.2	655.2
	10	10.75	10.136	30	0.307	34.24	719.04
	10	10.75	10.02	40	0.365	40.48	850.08
	12	12.75	12.374	—	0.188	25.22	529.62
	12	12.75	12.25	20	0.25	33.38	700.98
	12	12.75	12.09	30	0.33	43.77	919.17
	12	12.75	12.0	Std.	0.375	49.56	1040.76
	12	12.75	11.938	40	0.406	53.52	1123.92

STOCK LENGTHS: Single (12 Foot) and Double (40 Foot) Random.

- Black Threaded and Coupled available in these sizes.
- + Galvanized Threaded and Coupled available these sizes.
- Galvanized Plain Ends available in these sizes.

Please contact our Sales Department for availability of sizes not listed.

Standard Steel Pipe



Black Pipes



EXTRA HEAVY ASTM A53 Grade A or B

Continuous or Electric Resistance Welded
All Dimensions and Weights are Nominal

Size in Inches	Diameters		Thickness Inches	Weight Per Foot Plain Ends Pounds	Weight Per 21' Length
	External Inches	Internal Inches			
3/8	0.675	0.423	0.126	0.74	15.54
1/2	0.84	0.546	0.147	1.09	22.89
3/4	1.05	0.742	0.154	1.47	30.87
1	1.315	0.957	0.179	2.17	45.57
1 1/4	1.66	1.278	1.91	3.0	63.0
1 1/2	1.9	1.5	0.2	3.63	76.23
2	2.375	1.936	0.218	5.02	105.42
2 1/2	2.875	2.323	0.276	7.66	160.86
3	3.5	2.9	0.3	10.25	215.25
3 1/2	4.0	3.364	0.318	12.51	262.71
4	4.5	3.826	0.337	14.98	314.58
5	5.563	4.813	0.375	20.78	436.38
6	6.625	5.761	0.432	28.57	599.97
8	8.625	7.625	0.5	43.39	911.19
10	10.75	9.75	0.5	54.74	1149.54

STOCK LENGTHS: Single (21 Foot) and Double (40 Foot) Random.

DOUBLE EXTRA HEAVY ASTM A53 Grade B or A106 Seamless Wall

All Dimensions and Weights are Nominal

Size in Inches	Diameters		Thickness Inches	Weight Per Foot Plain Ends Pounds	Weight Per 21' Length
	External Inches	Internal Inches			
1/2	0.84	0.252	0.294	1.71	35.91
3/4	1.05	0.434	0.308	2.44	51.24
1	1.315	0.599	0.358	3.66	76.86
1 1/4	1.66	0.896	0.382	5.21	109.41
1 1/2	1.9	1.1	0.4	6.41	134.61
2	2.375	1.503	0.436	9.03	189.63
2 1/2	2.875	1.771	0.552	13.7	287.7
3	3.5	2.3	0.6	18.58	390.18
3 1/2	4.0	2.728	0.636	22.85	479.85
4	4.5	3.152	0.674	27.54	578.34
5	5.563	4.063	0.75	38.55	809.55
6	6.625	4.897	0.864	53.16	1116.36

STOCK LENGTHS: Single (21 Foot) Lengths.
Some sizes are available in double Random Lengths.

A.S.P. Pipe Schedules



Pipe Size	O.D. in Inches	5	10	20	30	40	Std.	60	80	E.H.	100	120	140	160	Dble. E.H.
1/8	0.405	0.035 0.1383	0.049 0.1863			0.068 0.2447	0.068 0.2447		0.095 0.3145	0.095 0.3145					
1/4	0.54	0.049 0.257	0.065 0.3297			0.088 0.4248	0.088 0.4248		0.119 0.5351	0.119 0.5351					
3/8	0.675	0.049 0.3276	0.065 0.4235			0.091 0.5676	0.091 0.5676		0.126 0.7388	0.126 0.7388					
1/2	0.84	0.065 0.538	0.083 0.671			0.109 0.851	0.109 0.8510		0.147 1.088	0.147 1.088				0.187 1.304	0.294 1.714
3/4	1.05	0.065 0.6838	0.083 0.8572			0.113 1.131	0.113 1.131		0.154 1.131	0.154 1.474				0.218 1.937	0.308 2.441
1	1.315	0.065 0.8678	0.109 1.404	0.1 *	0.125 *	0.133 1.679	0.133 1.679		0.179 2.172	0.179 2.172				0.25 2.844	0.358 3.659
1 1/4	1.66	0.065 1.107	0.109 1.806	0.1 *	0.125 *	0.14 2.273	0.14 2.273		0.191 2.997	0.191 2.997				0.25 3.765	0.382 5.214
1 1/2	1.99	0.065 1.274	0.109 2.085	0.11 *	0.125 *	0.145 2.718	0.145 2.718		0.2 3.631	0.2 3.631				0.281 4.859	0.4 6.408
2	2.375	0.065 1.604	0.109 2.638	0.125 *		0.154 3.653	0.154 3.653		0.218 5.022	0.218 5.022				0.343 7.444	0.436 9.029
2 1/2	2.875	0.083 2.475	0.12 3.531			0.203 5.793	0.203 5.793		0.276 7.661	0.276 7.661				0.375 10.01	0.552 13.7
3	3.5	0.083 3.029	0.12 4.332	0.125 *	0.188 *	0.216 7.576	0.216 7.576		0.3 10.25	0.3 10.25				0.438 14.32	0.6 18.58
3 1/2	4.0	0.083 3.472	0.12 4.973			0.226 9.109	0.226 9.109		0.318 12.51	0.318 12.51					0.636 22.85
4	4.5	0.083 3.915	0.12 5.613			0.237 10.79	0.237 10.79	0.281 12.66	0.337 14.98	0.337 14.98		0.438 19.0		0.531 22.51	0.674 27.54
4 1/2	5.0					0.247 12.53				0.355 17.61					0.71 32.53

Bold Face Figures = Wall Thickness in Inches

Light Face Figures = Weight per Foot in Pounds

Pipe Size	O.D. In Inches	5	10	20	30	40	Std.	60	80	E.H.	100	120	140	160	Dble. E.H.
5	5.563	0.109 6.349	0.134 7.77			0.258 14.62	0.258 14.62		0.375 20.78	0.375 20.78		0.5 27.04		0.625 32.96	0.75 38.55
6	6.625	0.109 7.585	0.134 9.289			0.28 18.97	0.28 18.97		0.432 28.57	0.432 28.57		0.562 36.39		0.718 45.3	0.864 53.16
7	7.625						0.301 23.57			0.5 38.05					0.875 63.08
8	8.625	0.109 9.914	0.148 13.4	0.25 22.36	0.277 24.7	0.322 28.55	0.322 28.55	0.406 35.64	0.5 43.39	0.5 43.39	0.593 50.87	0.718 60.63	0.812 67.76	0.906 74.69	0.875 72.42
9	9.625						0.342 33.9			0.5 48.72					
10	10.75	0.134 15.19	0.165 18.7	0.25 28.04	0.307 34.24	0.365 40.48	0.365 40.48	0.5 54.74	0.593 64.33	0.5 54.74	0.718 79.93	0.843 89.2	1.0 104.1	1.125 115.6	
11	11.75						0.375 45.55			0.5 60.07					
12	12.75	0.165 22.18	0.18 24.2	0.25 33.38	0.33 43.77	0.406 53.53	0.375 49.56	0.562 73.16	0.687 88.51	0.5 65.42	0.843 107.2	1.0 125.5	1.125 139.7	1.312 160.3	
14	14.0		0.25 36.71	0.312 45.68	0.375 54.57	0.437 63.37	0.375 54.57	0.593 84.91	0.75 106.1	0.5 72.09	0.937 130.7	1.093 150.7	1.25 170.2	1.406 189.1	
16	16.0		0.25 42.05	0.312 52.36	0.375 62.58	0.5 82.77	0.375 62.58	0.656 107.5	0.843 136.5	0.5 82.77	1.031 164.8	1.218 192.3	1.437 223.5	1.593 245.1	
18	18.0		0.25 47.39	0.312 59.03	0.437 82.06	0.562 104.8	0.375 70.59	0.75 138.2	0.937 170.8	0.5 93.45	1.156 208.0	1.375 244.1	1.562 274.2	1.781 308.5	
20	20.0		0.25 52.73	0.375 78.6	0.5 104.1	0.593 122.9	0.375 78.6	0.812 166.4	1.031 208.9	0.5 104.1	1.28 256.1	1.5 296.4	1.75 341.1	1.968 379.0	
24	24.0		0.25 63.41	0.375 94.62	0.562 140.8	0.687 171.2	0.375 94.62	0.968 238.1	1.218 296.4	0.5 125.5	1.531 367.4	1.812 429.4	2.062 483.1	2.343 541.9	

Bold Face Figures = Wall Thickness in Inches

Light Face Figures = Weight per Foot in Pounds

A.S.A. Pipe Schedules




SQUARE (SQR)
ASTM A500 A, B, C or CSA G40.21 50W/350W



External Inches	Wall Thickness Inches	Weight Per Foot	Weight Per 20' Length
1 x 1	0.1	1.14	22.8
	0.125	1.35	27.0
1¼ x 1¼	0.1	1.48	29.6
	0.125	1.78	35.6
1½ x 1½	0.1	1.82	36.4
	0.125	2.21	44.2
	0.188	3.35	67.0
2 x 2	0.1	2.5	50.0
	0.125	3.06	61.2
	0.15	3.727	74.54
	0.188	4.33	86.6
	0.25	5.41	108.2
2½ x 2½	0.1	3.18	63.6
	0.125	3.91	78.2
	0.188	5.61	112.2
	0.215	6.28	125.6
	0.25	7.11	142.2
3 x 3	0.1	3.86	77.2
	0.125	4.76	95.2
	0.188	6.89	137.8
	0.25	8.81	176.2
	0.313	10.59	211.8
	0.375	12.17	243.4
3½ x 3½	0.188	8.17	163.4
	0.25	10.51	210.2
	0.375	14.71	294.2
4 x 4	0.125	6.46	129.2
	0.188	9.45	189.0
	0.25	12.21	244.2
	0.313	14.84	296.8
	0.375	17.27	345.4
	0.5	21.63	432.6
5 x 5	0.125	8.15	163.0
	0.188	12.0	240.0
	0.25	15.62	312.4
	0.313	19.08	381.6
	0.375	22.37	447.4
	0.5	28.43	568.6

STOCK LENGTHS: 20, 24, 40 and 48 Feet.
Some sizes available in 60 Foot Lengths.
KleenKote available as a special order.

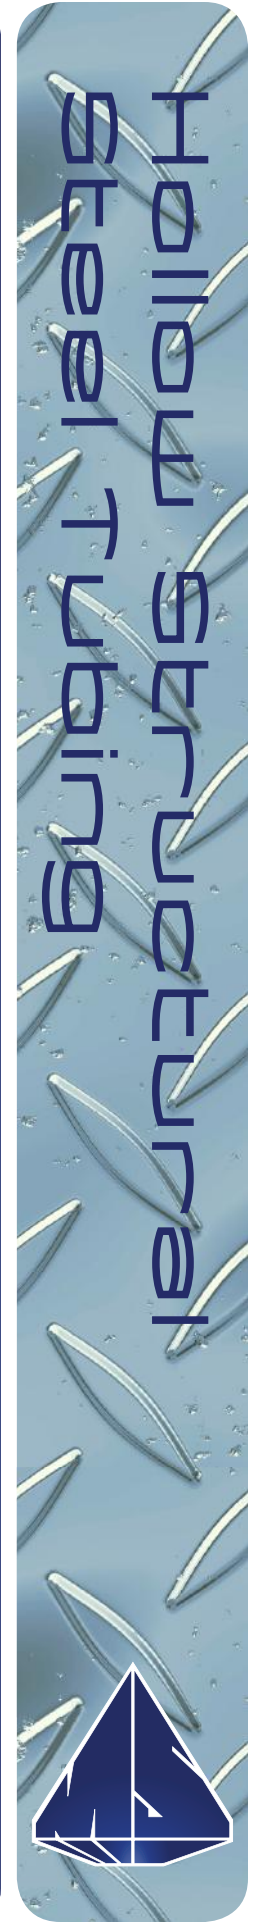

Hollow Structural Steel Tubing



SQUARE (SQR) ASTM A500 A, B, C or CSA G40.21 50W/350W

External Inches	Wall Thickness Inches	Weight Per Foot	Weight Per 20' Length
6 x 6	0.188	14.56	291.2
	0.25	19.02	380.4
	0.313	23.35	467.0
	0.375	27.48	549.6
	0.5	35.24	704.8
7 x 7	0.188	17.13	342.6
	0.25	22.42	448.4
	0.313	27.63	552.6
	0.375	32.58	651.6
	0.5	42.05	841.0
8 x 8	0.25	25.82	516.4
	0.313	31.9	638.0
	0.375	37.69	753.8
	0.5	48.85	977.0
10 x 10	0.25	32.63	652.6
	0.313	40.37	807.4
	0.375	47.9	958.0
	0.5	62.46	1249.2
12 x 12	0.25	39.43	788.6
	0.375	58.1	1162.0
	0.5	76.07	1521.4

STOCK LENGTHS: 20, 24, 40 and 48 Feet.

Some sizes available in 60 Foot Lengths.

KleenKote available as a special order.



RECTANGLE (RECT)
 ASTM A500 A, B, C or CSA G40.21 50W/350W

External Inches	Wall Thickness Inches	Weight Per Foot	Weight Per 20' Length
2 x 1	0.1	1.82	36.4
	0.125	2.21	44.2
2½ x 1½	0.1	2.5	50.0
	0.125	3.06	61.2
3 x 1½	0.125	3.48	69.6
	0.188	4.96	99.2
3 x 2	0.125	3.91	78.2
	0.188	5.61	112.2
	0.25	7.11	142.2
3½ x 2½	0.188	6.89	137.8
4 x 2	0.125	4.76	95.2
	0.188	6.89	137.8
	0.25	8.81	176.2
	0.313	10.58	211.6
4 x 3	0.125	5.61	112.2
	0.188	8.17	163.4
	0.25	10.51	210.2
	0.375	14.71	294.2
5 x 2	0.125	5.61	112.2
	0.15	6.64	132.8
	0.188	8.17	163.4
	0.25	10.51	210.2
5 x 2½	0.188	8.8	176.0
5 x 3	0.125	6.46	129.2
	0.188	9.45	189.0
	0.25	12.21	244.2
	0.313	14.83	296.6
	0.375	17.27	345.4
6 x 2	0.125	6.46	129.2
	0.188	9.45	189.0
	0.25	12.21	244.2
	0.375	17.27	345.4
6 x 3	0.188	10.7	214.0
	0.25	13.91	278.2
	0.375	19.82	396.4

STOCK LENGTHS: 20, 24, 40 and 48 Feet.

Some sizes available in 60 Foot Lengths.

KleenKote available as a special order.



HOLLOW STRUCTURAL
 STEEL TUBING

Hollow Structural Steel Tubing



RECTANGLE (RECT) ASTM A500 A, B, C or CSA G40.21 50W/350W

External Inches	Wall Thickness Inches	Weight Per Foot	Weight Per 20' Length
6 x 4	0.188	12.0	240.0
	0.25	15.62	312.4
	0.313	19.08	381.6
	0.375	22.37	447.4
	0.5	28.43	568.6
7 x 5	0.25	19.02	380.4
	0.375	27.48	549.6
	0.5	35.24	704.8
8 x 2	0.188	11.97	239.4
	0.25	15.62	312.4
8 x 3	0.25	17.32	346.4
8 x 4	0.188	14.56	291.2
	0.25	19.02	380.4
	0.375	27.48	549.6
	0.5	35.24	704.8
8 x 6	0.188	17.13	342.6
	0.25	22.42	448.4
	0.375	32.58	651.6
	0.5	42.05	841.0
8½ x 2	0.125	8.6	172.0
9 x 7	0.25	25.82	516.4
	0.375	37.69	753.8
10 x 2	0.25	19.02	380.4
10 x 4	0.25	22.42	448.4
	0.375	32.58	651.6
10 x 6	0.25	25.82	516.4
	0.375	37.69	753.8
	0.5	48.85	977.0
12 x 2	0.25	22.42	448.4
12 x 6	0.25	29.23	584.6
	.375	42.79	855.8
	0.5	55.66	1113.2
12 x 8	0.25	32.63	652.6
	0.375	47.9	958.0
	0.5	62.46	1249.2

STOCK LENGTHS: 20, 24, 40 and 48 Feet.

Some sizes available in 60 Foot Lengths.


KleenKote available as a special order.

ROUNDS (RDS)
 ASTM A500 GRADE "C" or CSA G40.21 GRADE 50W/350W



External Inches	Wall Thickness Inches	Weight Per Foot	Weight Per 24' Length
1.05 O.D.	0.1	1.02	24.48
1.315 O.D.	0.1	1.3	31.2
	0.125	1.59	38.16
1.66 O.D.	0.1	1.67	40.08
	0.125	2.05	49.2
1.9 O.D.	0.1	1.92	46.08
	0.125	2.38	57.12
	0.145	2.72	65.28
	0.188	3.44	82.56
2.375 O.D.	0.125	3.01	72.24
	0.154	3.66	87.84
	0.188	4.391	105.38
2.875 O.D.	0.125	3.68	88.32
	0.188	5.4	129.6
	0.203	5.83	139.92
	0.25	7.01	168.24
3.0 O.D.	0.125	3.84	92.16
3.5 O.D.	0.188	6.65	159.6
	0.25	8.68	208.32
4.0 O.D.	0.125	5.17	124.08
	0.188	7.67	184.08
	0.25	10.0	240.0
4.5 O.D.	0.25	11.35	272.4
	0.375	16.52	396.48
5.0 O.D.	0.125	6.51	156.24
	0.188	9.66	231.84
	0.25	12.69	304.56
6.0 O.D.	0.188	11.67	280.08
	0.25	15.37	368.88
6.625 O.D.	0.188	12.92	310.08
	0.25	17.02	408.48
	0.28	18.97	455.28
	0.375	25.1	602.4
	0.5	32.71	785.04
8.625 O.D.	0.188	16.94	406.56
	0.25	22.36	536.64
	0.322	28.55	685.2
	0.375	33.04	792.96
	0.5	43.39	1,041.36
10.375 O.D.	0.365	40.48	971.52
	0.5	54.74	1,313.76
12.375 O.D.	0.375	49.6	1,190.4
	0.5	65.41	1,569.84

STOCK LENGTHS: 24 and 48 Feet.

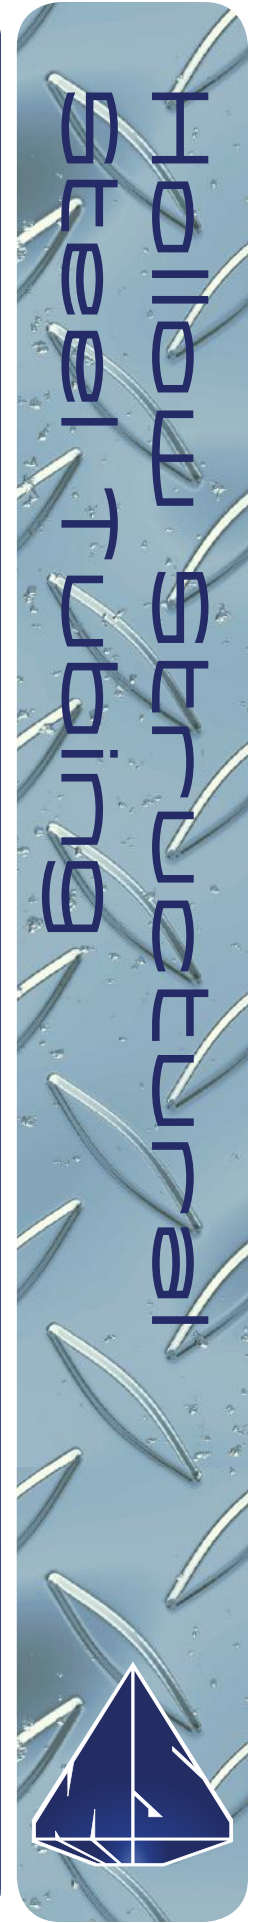

Tubing

ERW ROUND TUBING C1010 ASTM A513

External Inches	Wall Thickness Inches	Weight Per Foot	Weight Per 20' Length
0.625 O.D.	0.063	0.378	7.56
0.75 O.D.	0.063	0.48	9.6
0.875 O.D.	0.063	0.56	11.2
1.0 O.D.	0.063	0.65	13.0
1.25 O.D.	0.063	0.82	16.4
1.5 O.D.	0.063	0.923	18.46
1.5 O.D.	0.095	1.43	28.6
1.75 O.D.	0.095	1.68	33.6

STOCK LENGTHS: 20 Feet.

ERW SQUARE & RECTANGULAR TUBING C1010 ASTM A513

External Inches	Wall Thickness Inches	Weight Per Foot	Weight Per 20' Length
0.5 x 0.5	0.063	0.379	7.58
0.625 x 0.625	0.063	0.5	10.0
0.75 x 0.75	0.063	0.609	12.18
1.0 x 1.0	0.063	0.829	16.58
1.25 x 1.25	0.063	1.05	21.0
1.5 x 0.5	0.063	0.763	15.26
1.5 x 0.75	0.063	0.939	18.78
1.5 x 1.5	0.063	1.269	25.38
2.0 x 1.0	0.063	1.27	25.4
2.0 x 2.0	0.063	1.688	33.76

STOCK LENGTHS: 20 Feet.

